

Robertshaw. ELECTRONIC WALL THERMOSTATS

9600 SERIES PROGRAMMABLE THERMOSTATS


The 9600 Series are the perfect thermostats for affordable temperature control. This series was engineered to meet the most demanding heating and cooling needs.

SPECIFICATIONS

Voltage	24 Volt AC (18-30 VAC), 50 or 60 Hz.
Current	1 amp max. load per terminal
Temperature range	45°F - 90°F (7°C - 32°C)
Battery	2 "AA" 1.5 Volt Alkaline included
Dimensions	5.5" W x 3.75" H x 1.25" D
Shipping weight	4 lbs. (6 per package)

FEATURES

- 1 Heat/1 Cool 9600, 9610 models; 2 Heat/2 Cool 9615, 9620 models
- Simple one button programming
- Automatic short cycle compressor protection
- Relay output for complete system compatibility
- Quickset™ Programming on 9610, 9615, 9620 models
- O and B Terminals on 9610, 9615 and 9620 models
- EER™ (Energy Efficient Recovery) on 9615 and 9620 models

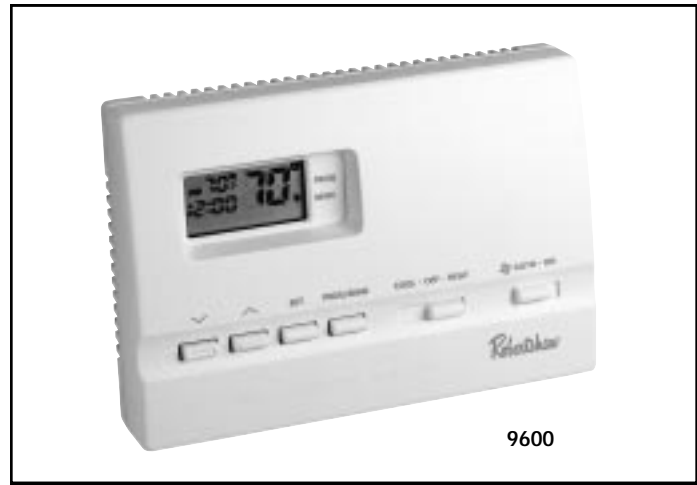

ORDERING DATA

UNI-LINE ORDER NO.	CANADIAN MODEL NO.	STAGING/APPLICATION	PROGRAMMING	TERMINATIONS	COMMENTS
9600	C9600	1 HEAT / 1 COOL GAS/ELECTRIC SYSTEMS	5-2 DAY	RH, RC, W, Y, G	SINGLE OR DUAL TRANSFORMER SYSTEM, BATTERY POWERED
9610	C9610	1 HEAT / 1 COOL GAS/ELECTRIC SYSTEMS, SINGLE STAGE HEAT PUMPS	7-DAY, W/QUICKSET™	RH, RC, W, Y, G, O, B	SINGLE OR DUAL TRANSFORMER SYSTEM, BATTERY POWERED
9615	C9615	2 HEAT / 2 COOL GAS/ELECTRIC SYSTEMS	7-DAY, W/QUICKSET™	C, R, W1, W2, Y1, Y2, G, O, B	COMMON REQUIRED, BATTERY BACK-UP
9620	C9620	2 HEAT / 2 COOL HEAT PUMP SYSTEMS	7-DAY, W/QUICKSET™	C, L, R, E, W2, Y1, Y2, G, O, B	COMMON REQUIRED, BATTERY BACK-UP